AIR / WATER - 20 bar

PAINTED STEEL

In accordance with directive **Atex 94/9 II 3 GD c X**



Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- **"viton"** seals

	FIXED	SWIVELLING	Hose supplied	Connection	
	Article	Article		inlet	outlet
S. 290	8290.100	-	without hose	F3/8"G	F3/8"G
	8290.101	-	10m - 3/8" (995.210)	F3/8"G	M3/8"G
	8290.104	-	15m - 1/4" (993.215)	F3/8"G	M1/4"G
S. 330	8330.100	-	without hose	F3/8"G	F3/8"G
	8330.101	-	12m - 3/8" (995.211)	F3/8"G	M3/8"G
S. 390	8390.100	8380.100	without hose	F3/8"G	F3/8"G
	8390.102	8380.102	18m - 3/8" (995.217)	F3/8"G	M3/8"G
S. 430	8430.100	8420.100	without hose	F1/2"G	F1/2"G
	8430.101	8420.101	12m - 3/8" (995.212)	F1/2"G	M3/8"G
	8430.102	8420.102	18m - 3/8" (995.218)	F1/2"G	M3/8"G
	8430.103	8420.103	10m - 1/2" (996.210)	F1/2"G	M1/2"G
	8430.104	8420.104	15m - 1/2" (996.215)	F1/2"G	M1/2"G
	for ABS hose reels Series 430 see page 152				
S. 530	8530.100	8520.100	without hose	F1/2"G	F1/2"G
	8530.101	8520.101	20m - 1/2" (996.220)	F1/2"G	M1/2"G
	8530.102	8520.102	25m - 1/2" (996.225)	F1/2"G	M1/2"G
S. 540	8540.100	8550.100	without hose	F1"G	F1"G
	8540.101	8550.101	15m - 3/4" (997.215)	F1"G	M3/4"G
	8540.102	8550.102	20m - 3/4" (997.220)	F1"G	M3/4"G
	8540.103	8550.103	15m - 1" (998.215)	F1"G	M1"G
	8540.105	8550.105	without hose	F1/2"G	F1/2"G
	8540.106	8550.106	30m - 1/2" (996.230)	F1/2"G	M1/2"G
S. 560	8560.100	-	without hose	F1"G	F1"G
	8560.101	-	30m - 3/4" (997.230)	F1"G	M3/4"G
	8560.103	-	40m - 3/4" (997.240)	F1"G	M3/4"G
	8560.104	-	20m - 1" (998.220)	F1"G	M1"G
	8560.105	-	30m - 1" (998.230)	F1"G	M1"G
	8560.106	-	without hose	F1/2"G	F1/2"G

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

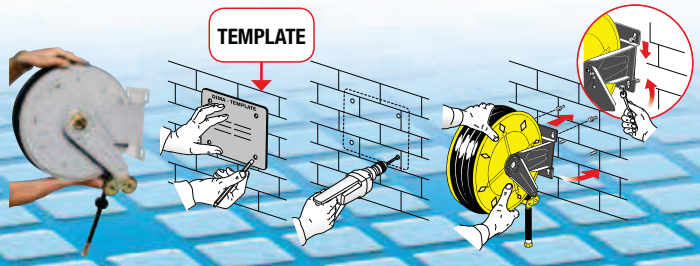

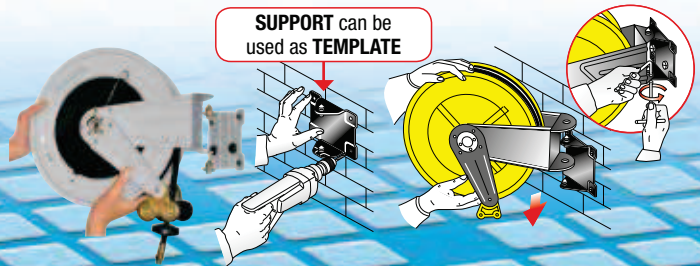

AIR / WATER - 20 bar

STAINLESS STEEL

In accordance with directive
Atex 94/9 II 3 GD c X



Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- **"viton"** seals

	FIXED	SWIVELLING	Hose supplied	Connection	
	Article	Article		inlet	outlet
S. 290	8292.100	-	without hose	F3/8"G	F3/8"G
	8292.101	-	10m - 3/8" (995.210)	F3/8"G	M3/8"G
	8292.104	-	15m - 1/4" (993.215)	F3/8"G	M1/4"G
S. 330	8332.100	-	without hose	F3/8"G	F3/8"G
	8332.101	-	12m - 3/8" (995.211)	F3/8"G	M3/8"G
S. 390	8392.100	8382.100	without hose	F3/8"G	F3/8"G
	8392.102	8382.102	18m - 3/8" (995.217)	F3/8"G	M3/8"G
S. 430	8432.100	8422.100	without hose	F1/2"G	F1/2"G
	8432.101	8422.101	12m - 3/8" (995.212)	F1/2"G	M3/8"G
	8432.102	8422.102	18m - 3/8" (995.218)	F1/2"G	M3/8"G
	8432.103	8422.103	10m - 1/2" (996.210)	F1/2"G	M1/2"G
	8432.104	8422.104	15m - 1/2" (996.215)	F1/2"G	M1/2"G
	for ABS hose reels Series 430 see page 153				
S. 530	8532.100	8522.100	without hose	F1/2"G	F1/2"G
	8532.101	8522.101	20m - 1/2" (996.220)	F1/2"G	M1/2"G
	8532.102	8522.102	25m - 1/2" (996.225)	F1/2"G	M1/2"G
S. 540	8542.100	8552.100	without hose	F1"G	F1"G
	8542.101	8552.101	15m - 3/4" (997.215)	F1"G	M3/4"G
	8542.102	8552.102	20m - 3/4" (997.220)	F1"G	M3/4"G
	8542.103	8552.103	15m - 1" (998.215)	F1"G	M1"G
	8542.105	8552.105	without hose	F1/2"G	F1/2"G
	8542.106	8552.106	30m - 1/2" (996.230)	F1/2"G	M1/2"G
S. 560	8562.100	-	without hose	F1"G	F1"G
	8562.101	-	30m - 3/4" (997.230)	F1"G	M3/4"G
	8562.103	-	40m - 3/4" (997.240)	F1"G	M3/4"G
	8562.104	-	20m - 1" (998.220)	F1"G	M1"G
	8562.105	-	30m - 1" (998.230)	F1"G	M1"G
	8562.106	-	without hose	F1/2"G	F1/2"G

FIXED OVERALL DIMENSIONS

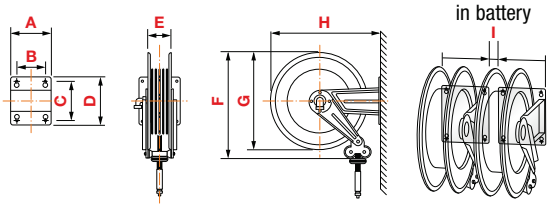

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg *
S. 290	186	140	196	226	110	310	300	320	-	0,037	from 7 to 12
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

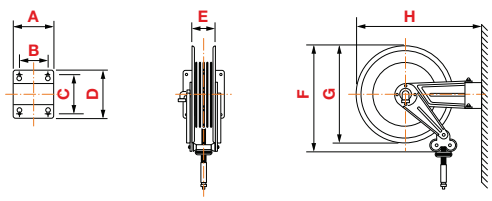

Art.	A	B	C	D	E	F	G	H	1-m³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight revers to heaviest version which depends on hose length and diameter.

WATER MAX 130°C - 100 bar

PAINTED STEEL

In accordance with directive **Atex** 94/9 IIB 2 GD c T4 T135 °C X



Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- **"viton"** seals

	FIXED	SWIVELLING	Hose supplied	Connection	
	Article	Article		inlet	outlet
S. 330	8330.200	-	without hose	F1/2"G	F 3/8"-1/2"G
	8330.201	-	12m - 3/8" (995.313)	F1/2"G	M3/8"G
S. 390	8390.200	8380.200	without hose	F1/2"G	F3/8"-1/2"G
	8390.202	8380.202	17m - 3/8" (995.318)	F1/2"G	M3/8"G
S. 430	8430.200	8420.200	without hose	F1/2"G	F1/2"G
	8430.201	8420.201	10m - 1/2" (996.311)	F1/2"G	M1/2"G
	8430.202	8420.202	15m - 1/2" (996.316)	F1/2"G	M1/2"G
	for ABS hose reels Series 430 see page 152				
S. 530	8530.200	8520.200	without hose	F1/2"G	F1/2"G
	8530.201	8520.201	20m - 1/2" (996.321)	F1/2"G	M1/2"G
S. 540	8540.200	8550.200	without hose	F1"G	F1"G
	8540.202	8550.202	20m - 3/4" (997.320)	F1"G	M3/4"G
	8540.203 *	8550.203 *	15m - 1" (998.315)	F1"G	M1"G
S. 560	8560.200	-	without hose	F1"G	F1"G
	8560.205 *	-	30m - 1" (998.330)	F1"G	M1"G
	* 50 bar	* 50 bar			

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

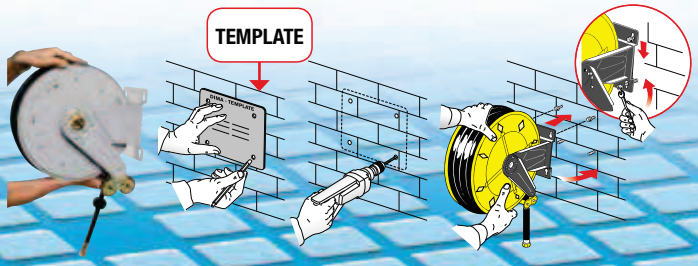

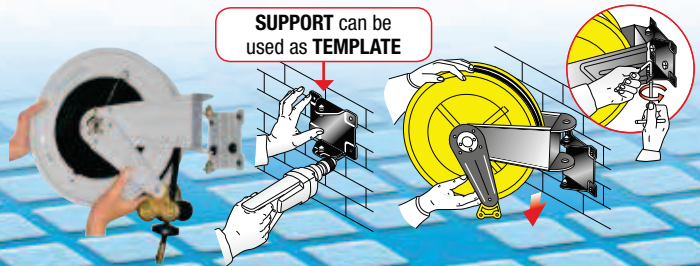

WATER MAX 130°C - 100 bar

STAINLESS STEEL

In accordance with directive **Atex** **94/9 IIB 2 GD c T4 T135 °C X**

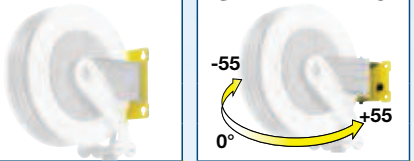

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- **"viton"** seals

	FIXED Article	SWIVELLING Article	Hose supplied	Connection inlet	Connection outlet
S. 330	8332.400	-	without hose	F1/2"G	F 3/8"-1/2"G
	8332.201	-	12m - 3/8" (995.313)	F1/2"G	M3/8"G
hygieninc hose	8333.202	-	12m - 3/8" (995.412)	F1/2"G	M3/8"G
S. 390	8392.200	8382.200	without hose	F1/2"G	F3/8"-1/2"G
	8392.202	8382.202	17m - 3/8" (995.318)	F1/2"G	M3/8"G
hygieninc hose	8393.201	8383.201	12m - 3/8" (995.412)	F1/2"G	M3/8"G
S. 430	8434.200	8424.200	without hose	F1/2"G	F1/2"G
	8432.201	8422.201	10m - 1/2" (996.311)	F1/2"G	M1/2"G
	8432.202	8422.202	15m - 1/2" (996.316)	F1/2"G	M1/2"G
hygieninc hose	8433.202	8423.202	15m - 1/2" (996.415)	F1/2"G	M1/2"G
	for ABS hose reels Series 430 see page 153				
S. 530	8534.200	8524.200	without hose	F1/2"G	F1/2"G
	8532.201	8522.201	20m - 1/2" (996.321)	F1/2"G	M1/2"G
hygieninc hose	8533.202	8523.202	25m - 1/2" (996.425)	F1/2"G	M1/2"G
S. 540	8544.200	8554.200	without hose	F1"G	F1"G
	8542.202	8552.202	20m - 3/4" (997.320)	F1"G	M3/4"G
	8542.203 *	8552.203 *	15m - 1" (998.315)	F1"G	M1"G
hygieninc hose	8543.202	8553.202	20m - 3/4" (997.420)	F1"G	M3/4"G
S. 560	8564.200	-	without hose	F1"G	F1"G
	8562.205 *	-	30m - 1" (998.330)	F1"G	M1"G

* 50 bar * 50 bar

FIXED OVERALL DIMENSIONS

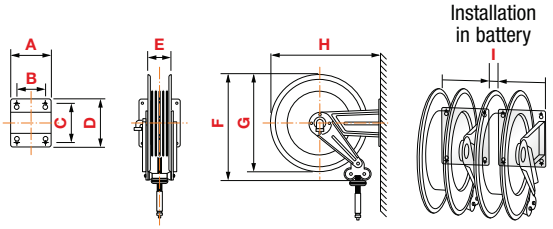

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

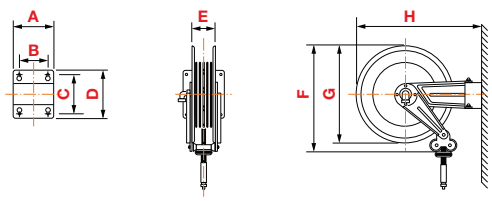

Art.	A	B	C	D	E	F	G	H	1-m³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight revers to heaviest version which depends on hose length and diameter.

WATER MAX 130°C - 200 bar

PAINTED STEEL

In accordance with directive **Atex** 94/9 IIB 2 GD c T4 T135 °C X

	FIXED	SWIVELLING	Hose supplied	Connection	
	Article	Article		inlet	outlet
S. 330	8330.300	-	without hose	F3/8"G	F3/8"G
	8330.301	-	12m - 5/16" (994.512)	F3/8"G	F3/8"G
S. 390	8390.300	8380.300	without hose	F3/8"G	F3/8"G
	8390.302	8380.302	17m - 5/16" (994.517)	F3/8"G	F3/8"G
S. 430	8430.300	8420.300	without hose	F3/8"G	F1/2"G
	8430.301	8420.301	12m - 3/8" (995.512)	F3/8"G	F3/8"G
	8430.302	8420.302	18m - 3/8" (995.518)	F3/8"G	F3/8"G
	for ABS hose reels Series 430 see page 152				
S. 530	8530.300	8520.300	without hose	F3/8"G	F1/2"G
	8530.301	8520.301	20m - 3/8" (995.520)	F3/8"G	F3/8"G
	8530.302	8520.302	25m - 3/8" (995.525)	F3/8"G	F3/8"G
S. 540	8540.300	8550.300	without hose	F3/8"G	F1/2"G
	8540.301	8550.301	30m - 3/8" (995.530)	F3/8"G	F3/8"G
S. 560	8560.300	-	without hose	F3/8"G	F1/2"G
	8560.301	-	40m - 3/8" (995.540)	F3/8"G	F3/8"G
	8560.302	-	50m - 3/8" (995.550)	F3/8"G	F3/8"G

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- **"viton"** seals



FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

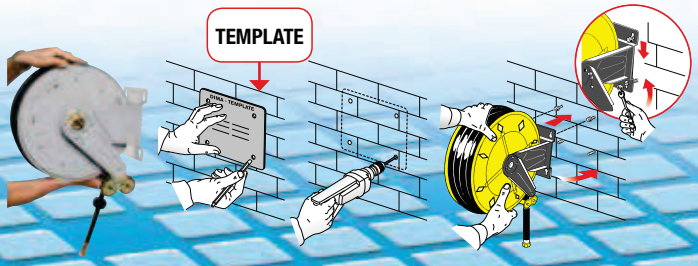

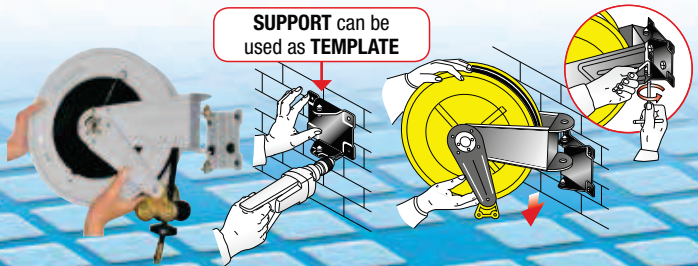

WATER MAX 130°C - 200 bar

STAINLESS STEEL

In accordance with directive **Atex** 94/9 IIB 2 GD c T4 T135 °C X

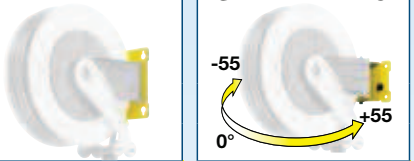

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- **"viton"** seals

	FIXED Article	SWIVELLING Article	Hose supplied	Connection inlet	Connection outlet
S. 330	8332.300	-	without hose	F3/8"G	F 3/8"G
	8332.301	-	12m - 5/16" (994.512)	F3/8"G	F3/8"G
hygieninc hose	8333.301	-	12m - 5/16" (994.612)	F3/8"G	F3/8"G
S. 390	8392.300	8382.300	without hose	F3/8"G	F 3/8"G
	8392.302	8382.302	17m - 5/16" (994.517)	F3/8"G	F3/8"G
hygieninc hose	8393.301	8383.301	12m - 5/16" (994.612)	F3/8"G	F3/8"G
S. 430	8434.300	8424.300	without hose	F3/8"G	F1/2"G
	8432.301	8422.301	12m - 3/8" (995.512)	F3/8"G	F3/8"G
	8432.302	8422.302	18m - 3/8" (995.518)	F3/8"G	F3/8"G
hygieninc hose	8433.302	8423.302	18m - 3/8" (995.618)	F3/8"G	F3/8"G
	for ABS hose reels Series 430 see page 153				
S. 530	8534.300	8524.300	without hose	F3/8"G	F1/2"G
	8532.301	8522.301	20m - 3/8" (995.520)	F3/8"G	F3/8"G
	8532.302	8522.302	25m - 3/8" (995.525)	F3/8"G	F3/8"G
hygieninc hose	8533.302	8523.302	25m - 3/8" (995.625)	F3/8"G	F3/8"G
S. 540	8544.300	8554.300	without hose	F3/8"G	F1/2"G
	8542.301	8552.301	30m - 3/8" (995.530)	F3/8"G	F3/8"G
hygieninc hose	8543.301	8553.301	30m - 3/8" (995.630)	F3/8"G	F3/8"G
S. 560	8564.300	-	without hose	F3/8"G	F1/2"G
	8562.301	-	40m - 3/8" (995.540)	F3/8"G	F3/8"G
	8562.302	-	50m - 3/8" (995.550)	F3/8"G	F3/8"G

FIXED OVERALL DIMENSIONS

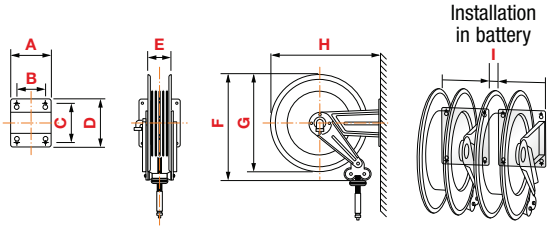

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

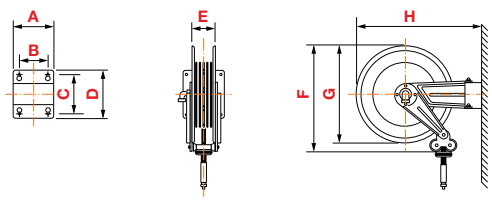

Art.	A	B	C	D	E	F	G	H	1-m³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight revers to heaviest version which depends on hose length and diameter.

WATER MAX 130°C - 400 bar

PAINTED STEEL

In accordance with directive **Atex** 94/9 IIB 2 GD c T4 T135 °C X



Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- **"teflon"** seals

	FIXED	SWIVELLING	Hose supplied	Connection	
	Article	Article		inlet	outlet
S. 330	8330.350	-	without hose	F3/8"G	F3/8"G
S. 390	8390.350	8380.350	without hose	F3/8"G	F3/8"G
	8390.352	8380.352	17m - 5/16" (994.717)	F3/8"G	F3/8"G
S. 430	8430.350	8420.350	without hose	F3/8"G	F1/2"G
	8430.352	8420.352	18m - 3/8" (995.818)	F3/8"G	F3/8"G
S. 530	8530.350	8520.350	without hose	F3/8"G	F1/2"G
	8530.352	8520.352	25m - 3/8" (995.825)	F3/8"G	F3/8"G
S. 540	8540.350	8550.350	without hose	F3/8"G	F1/2"G
S. 560	8560.350	-	without hose	F3/8"G	F1/2"G

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

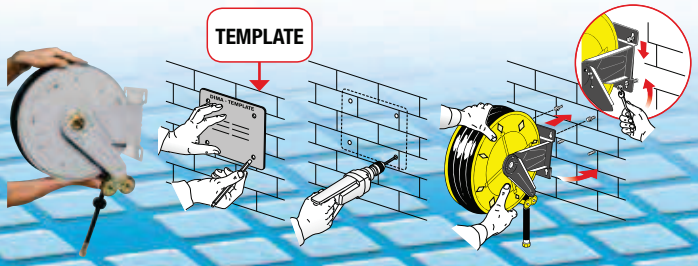

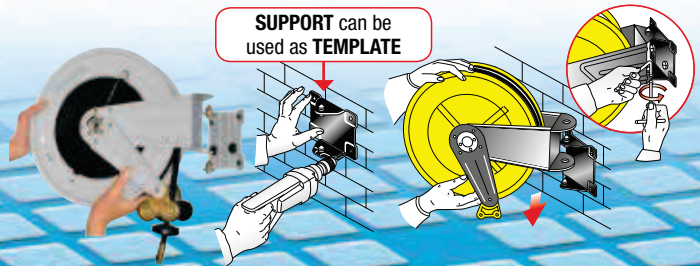

WATER MAX 130°C - 400 bar

STAINLESS STEEL

In accordance with directive **Atex** **94/9 IIB 2 GD c T4 T135 °C X**

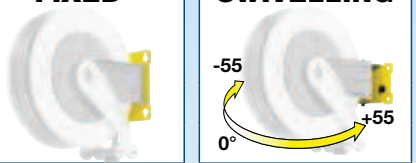

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- **"teflon"** seals

	FIXED	SWIVELLING	Hose supplied	Connection	
	Article	Article		inlet	outlet
S. 330	8332.350	-	without hose	F3/8"G	F3/8"G
S. 390	8392.350	8382.350	without hose	F3/8"G	F3/8"G
	8392.352	8382.352	17m - 5/16" (994.717)	F3/8"G	F3/8"G
S. 430	8434.350	8424.350	without hose	F3/8"G	F1/2"G
	8432.352	8422.352	18m - 3/8" (995.818)	F3/8"G	F3/8"G
hygieninc hose	8433.352	8423.352	18m - 3/8" (995.918)	F3/8"G	F3/8"G
S. 530	8534.350	8524.350	without hose	F3/8"G	F1/2"G
	8532.352	8522.352	25m - 3/8" (995.825)	F3/8"G	F3/8"G
hygieninc hose	8533.352	8523.352	25m - 3/8" (995.925)	F3/8"G	F3/8"G
S. 540	8544.350	8554.350	without hose	F3/8"G	F1/2"G
S. 560	8564.350	-	without hose	F3/8"G	F1/2"G

FIXED OVERALL DIMENSIONS

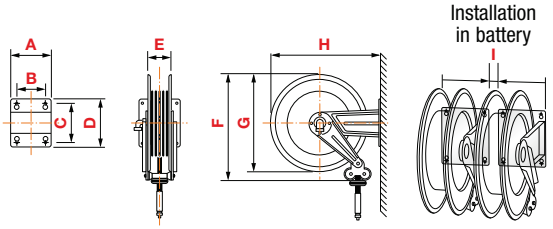

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

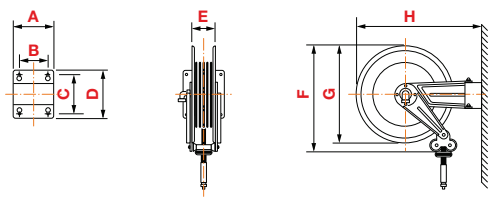

Art.	A	B	C	D	E	F	G	H	1-m³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight revers to heaviest version which depends on hose length and diameter.