



OIL AND SIMILAR PRODUCTS - 150 bar

PAINTED STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X

FIXED




Article

8330.400
8330.402

S. 330

SWIVELLING



Article

-
-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- carbon steel swivel joint
- "polyurethane" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F1/2"G	F 3/8"-1/2"G
12m - 3/8" (995.312)	F1/2"G	M1/2"G

	8390.400	8380.400	without hose	F1/2"G	F 3/8"-1/2"G
S. 390	8390.401	8380.401	12m - 3/8" (995.312)	F1/2"G	M1/2"G
	8390.402	8380.402	17m - 3/8" (995.317)	F1/2"G	M1/2"G

	8430.400	8420.400	without hose	F1/2"G	F1/2"G
S. 430	8430.401	8420.401	10m - 1/2" (996.310)	F1/2"G	M1/2"G
	8430.402	8420.402	15m - 1/2" (996.315)	F1/2"G	M1/2"G

for ABS hose reels Series 430 see page 152

	8530.400	8520.400	without hose	F1/2"G	F1/2"G
S. 530	8530.401	8520.401	20m - 1/2" (996.320)	F1/2"G	M1/2"G
	8530.402	8520.402	25m - 1/2" (996.325)	F1/2"G	M1/2"G

	8540.400	8550.400	without hose	F1"G	F1"G
	8540.411 **	8550.411 **	15m - 3/4" (997.3315)	F1"G	M3/4"G
S. 540	8540.412 **	8550.412 **	20m - 3/4" (997.3320)	F1"G	M3/4"G
	8540.413 *	8550.413 *	15m - 1" (998.3315)	F1"G	M1"G
	8540.405	8550.405	without hose	F1/2"G	F1/2"G
	8540.406	8550.406	30m - 1/2" (996.330)	F1/2"G	M1/2"G

S. 560	8560.400	-	without hose	F1"G	F1"G
	8560.415 *	-	30m - 1" (998.3330)	F1"G	M1"G

* 50 bar
** 100 bar

* 50 bar
** 100 bar



FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.

The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables 55° rotation to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

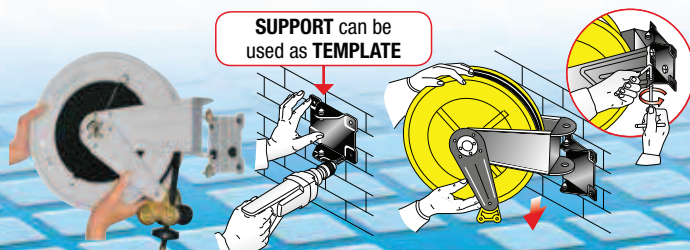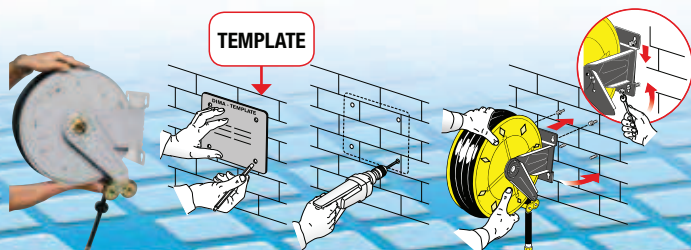



OIL AND SIMILAR PRODUCTS - 150 bar

STAINLESS STEEL




In accordance with directive ATEX
94/9 IIB 2 GD c T4 T135 °C X

FIXED



Article

SWIVELLING



Article

Supplied with:


- zinc plated steel couplings
- AISI 304 stainless steel swivel joint
- "viton" seals

Hose supplied

Connection

inlet

outlet

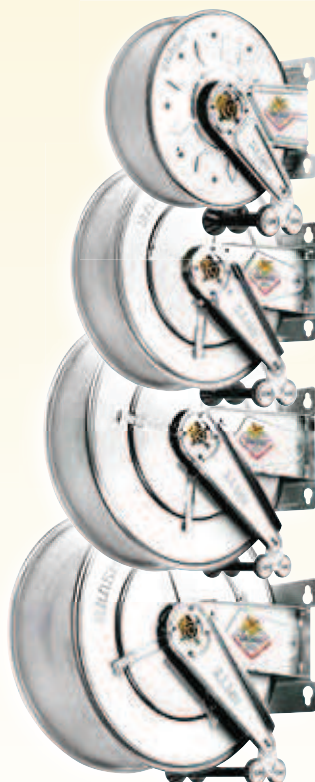

S. 390

8392.200

8382.200

without hose

F1/2"G

F 3/8"-1/2"G

S. 430

8434.200

8424.200

without hose

F1/2"G

F1/2"G

for ABS hose reels Series 430 see page 153

S. 530

8534.200

8524.200

without hose

F1/2"G

F1/2"G

S. 540

8544.200


8554.200

without hose

F1"G


F1"G

FIXED OVERALL DIMENSIONS

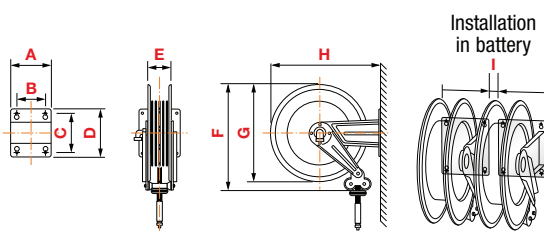

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

SWIVELLING OVERALL DIMENSIONS

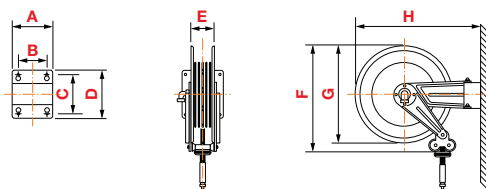

Art.	A	B	C	D	E	F	G	H	1-m ³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43
S. 550	300	218	226	268	190	560	510	702	0,175	from 25 to 41

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.



GREASE - 400 bar

PAINTED STEEL



In accordance with directive Atex
94/9 IIB 2 GD c T4 T135 °C X

FIXED




Article

8330.500 *
8330.501

S. 330

SWIVELLING



Article

-
-

Supplied with:

- hoses in black synthetic rubber
- zinc plated steel couplings
- carbon steel swivel joint
- "polyurethane" seals



Hose supplied	Connection	
	inlet	outlet
without hose	F3/8"G	F3/8"
12m - 1/4" (993.511)	F3/8"G	M1/4"G

S. 390	8390.500 *	8380.500 *	without hose	F3/8"G	F3/8"G
	8390.501	8380.501	12m - 1/4" (993.511)	F3/8"G	M1/4"G
	8390.502	8380.502	16m - 1/4" (993.516)	F3/8"G	M1/4"G

S. 430	8430.500 *	8420.500 *	without hose	F3/8"G	F1/2"G
	8430.501	8420.501	12m - 1/4" (993.512)	F3/8"G	M1/4"G
	8430.502	8420.502	18m - 1/4" (993.518)	F3/8"G	M1/4"G
	8430.505	8420.505	10m - 3/8" (995.710)	F3/8"G	M1/4"G
	8430.506	8420.506	15m - 3/8" (995.715)	F3/8"G	M1/4"G

for ABS hose reels Series 430 see page 152

S. 530	8530.500 *	8520.500 *	without hose	F3/8"G	F1/2"G
	8530.501	8520.501	20m - 3/8" (995.720)	F3/8"G	M1/4"G
	8530.502	8520.502	25m - 3/8" (995.725)	F3/8"G	M1/4"G

S. 540	8540.500 *	8550.500 *	without hose	F3/8"G	F1/2"G
	8540.501	8550.501	30m - 3/8" (995.730)	F3/8"G	M1/4"G


* 600 bar

* 600 bar

FIXED HOSE REELS INSTALLATION


The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.

The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

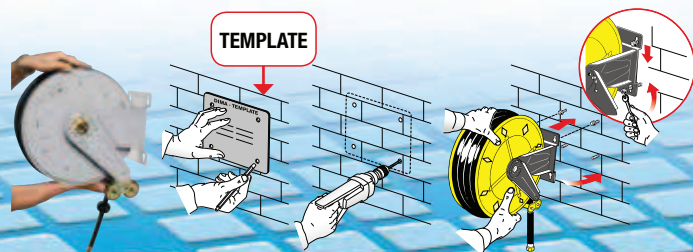

SWIVELLING HOSE REELS INSTALLATION

The **quick coupling swivelling support** facilitates hose reel installation and enables 55° rotation to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.

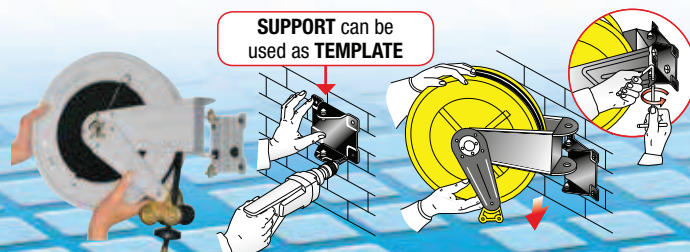



GREASE - 600 bar

STAINLESS STEEL



In accordance with directive ATEX
94/9 IIB 2 GD c T4 T135 °C X

FIXED



Article

SWIVELLING



Article

Supplied with:


- zinc plated steel couplings
- carbon steel swivel joint
- "polyurethane" seals

Hose supplied

Connection

inlet

outlet

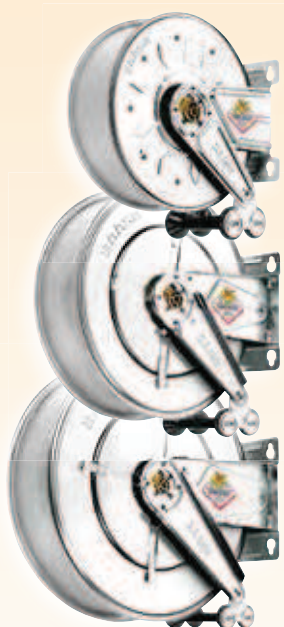

S. 390

8392.500

8382.500

without hose

F3/8"G

F 3/8"G

S. 430

8432.500

8422.500

without hose

F3/8"G

F1/2"G

for ABS hose reels Series 430 see page 153

S. 530

8532.500


8522.500

without hose

F3/8"G


F1/2"G

FIXED OVERALL DIMENSIONS

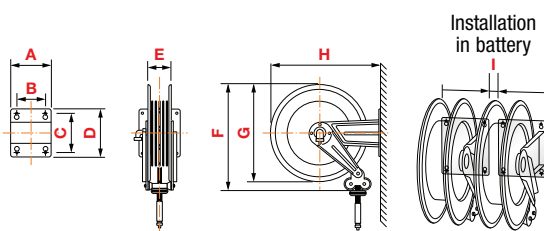

Art.	A	B	C	D	E	F	G	H	I	1-m ³	Kg *
S. 330	186	140	196	226	110	355	350	365	20	0,045	from 8 to 13
S. 390	186	140	196	226	110	400	390	410	20	0,068	from 11 to 18
S. 430	186	140	196	226	115	460	420	460	20	0,098	from 14 to 24
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40

SWIVELLING OVERALL DIMENSIONS

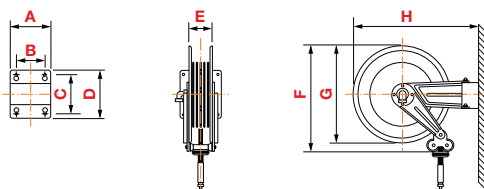

Art.	A	B	C	D	E	F	G	H	1-m ³	Kg
S. 380	184	146	106	144	110	400	390	484	0,098	from 12 to 19
S. 420	208	162	118	164	115	460	420	541	0,098	from 15 to 25
S. 520	228	182	154	200	115	560	510	642	0,120	from 20 to 43

* The list shows min and max weight for each series: min weight refers to version without hose, max weight refers to heaviest version which depends on hose length and diameter.